




EXTRUTECH PLASTICS, INC.

"Custom Extruder of Close Tolerance Profiles"

FOR QUOTE, FAX TO (920) 684-4344

Pre-Hung Corrosion Proof PVC Double Doors

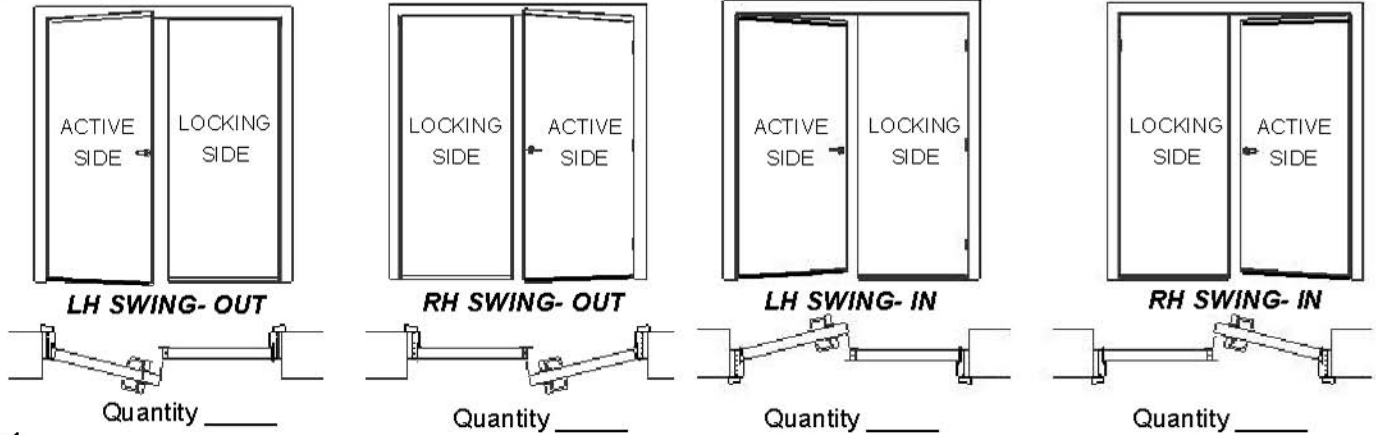

1. **Door Swing**

View Door Unit from outside room.

Please circle item and list qty.

2. Rough Opening Size _____ Wall Thickness _____

3. Door Location

Door will be for Interior use only.

4. Frame Options

3" Jamb
 4 9/16" Jamb
 6 9/16" Jamb

5. Frame Options

PVC Sill No Sill
 Colonial Casing x2
 Brickmoulding x2
 3 1/2" Foam Brd x2

6. Windows

16 x 16 Window x2
 20 x 24 Window x2
 _____ Window
 Insul Glass / 1/4" Plexi

7. Standard Door Size

Size out to out Rough opening

5468 67"x 82" 67.5"x 82.25"

6068 75"x 82" 75.5"x 82.25"

5470 67"x 86" 67.5"x 86.25"

6070 75"x 86" 75.5"x 86.25"

Custom Size _____ x _____

8. Panel Options

Insulated Door Panel

Rough Opening Buck

Door Closer Reinforcement

Door Closer - (Reversible)

Door Latch Cover Plate

9. Lock Options

Locking.

Knob(Round) Lever

NON Locking

Knob(Round) Lever

Door Knob Bore

Dead Bolt Bore

S.S. Barn Latch

Push / Pull Plates

10. COMPANY NAME _____ DATE: _____

NAME _____ CITY _____

ADDRESS _____ STATE _____ ZIP _____

TELEPHONE _____ CELL.# _____ FAX _____

11. Please Sign Customer Approval if all information is correct and return.

Customer Approval : _____ Date: _____

Note: Painting or use as Exterior Door will void Door Warranty.

" DOORS ARE NOT FIRE RATED"

5902 W. Custer Manitowoc, WI 54220 Phone 1-888-818-0118 Fax 920-684-4344

Phone 920-684-9650 www.epiplastics.com e-mail: info@epiplastics.com

