



EXTRUTECH PLASTICS, INC.

"Custom Extruder of Close Tolerance Profiles"

FOR QUOTE , FAX TO (920) 684-4344

Pre-Hung Corrosion Proof PVC Interior Doors


1. Door Location

- Door will be for Interior use only.

2. Door Swing

Circle your choice

Note: Painting or use as Exterior Door will void Door Warranty.

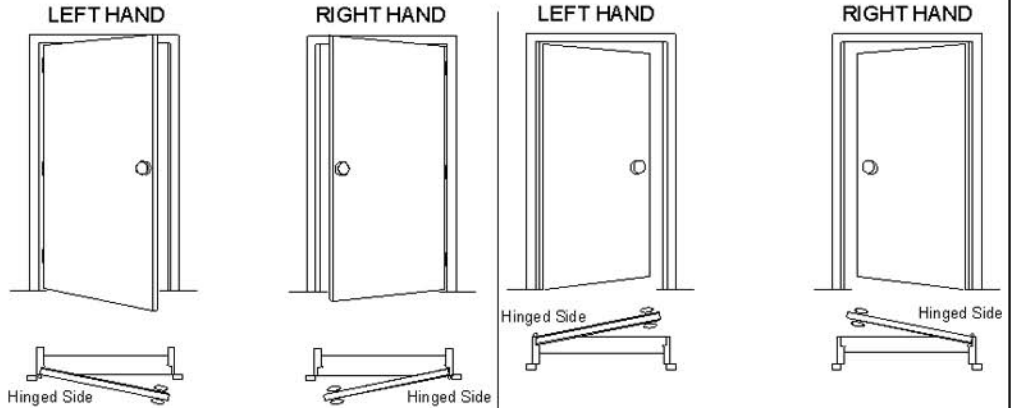

Quantity _____

Quantity _____

Quantity _____

Quantity _____

SWING- OUT
(Door Swing)

SWING- IN
(Door Swing)

View Door Unit from outside room.

3. Frame Options

- 3" Jamb (For EPI Wall System)
- 4 9/16" Jamb
- 6 9/16" Jamb
- PVC Sill No Sill
- Colonial Casing x2
- Brickmoulding x2
- 3 1/2"x5/8 Foam Brd. x2
- _____

4. Window Options

- 16 x 16 Window
- 20 x 24 Window
- _____ Window
- Insul Glass / 1/4" Plexi

5. Standard Door Size

- Size out to out Rough opening*
- 2868 34" x 82" 35"x 83"
 - 3068 38" x 82" 39"x 83"
 - 2870 34" x 86" 35"x 87"
 - 3070 38" x 86" 39"x 87"
 - Frame Size _____ x _____

6. Panel Options

- Insulated Door Panel
- Rough Opening Buck
- Door Closer Reinforcement
- Door Closer - (Reversible)
- Door Latch Cover Plate
- Double Swing Door
- _____

7. Lock Options

- Locking.
- Knob(Round) Lever
- NON Locking
- Knob(Round) Lever
- Door Knob Bore
- Dead Bolt Bore
- S.S. Barn Latch
- Push / Pull Plates
- _____

8. " DOORS ARE NOT FIRE RATED"

Rough Opening Size _____ Wall Thickness _____

9. COMPANY NAME _____ DATE: _____
 NAME _____ CITY _____
 ADDRESS _____ STATE _____ ZIP _____
 TELEPHONE _____ CELL.# _____ FAX _____

10.

Please Sign Customer Approval if all information is correct and return.

Customer Approval : _____ Date: _____

Note: Painting or use as Exterior Door will void Door Warranty.

For Office use Only:

5902 W. Custer Manitowoc, WI 54220 Phone 1-888-818-0118 Fax 920-684-4344

Phone 920-684-9650 www.epiplastics.com e-mail: info@epiplastics.com

